GEOFRAME
PROCESSED
INTERPRETATION

Integrated Log Well Montage

Initial Processed Data

*A Mark of Schlumberger

Using the following logs: CMR*, CNL*, TLD*
AIT*, FMI*
ECS*, NGT*

COMPANY:	Kleinfelder
WELL:	R-26
FIELD:	Canon de Valle, Just East of Hwy 4
COUNTY:	Los Alamos
STATE:	New Mexico
COUNTRY:	U.S.
Date Logged:	28-Sep-2003 Date Processed: 7-Oct-2003
Well Location:	Easting: 1,610,220
	Northing: 1,764,690
Elevations:	KB: DF: GL: 7639.00 ft
API Number:	Job Number:

FOLD HERE The well name, location, borehole reference data were furnished by the customer.

All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretations made by any of our officers, agents or employees. These interpretations are also subject to Clause 4 of our General Terms and Conditions as set out in our current Price Schedule.

Field Recording:	Location:	Farmington	Software Version:	11C0-305	Engineer:	Tom Hansen	
Office Recording:	ICS Center:	SWS Sacramento	Baseline:	GF3.8.1	Log Analyst:	Ned Clayton	
Mud and Borehole Measurements:							
Rm @ Measured temperature:	2.860 ohm.m @83.0 degF		BHT:	82.0 degF	Bitsize:	12.2 in	
Rmf @ Measured temperature:	2.145 ohm.m @83.0 degF		Type Fluid in Hole		Air / Fresh Water		
Rmc @ Measured temperature:	4.290 ohm.m @83.0 degF		Mud Density:	8.34 lbm/gal			

Remarks:
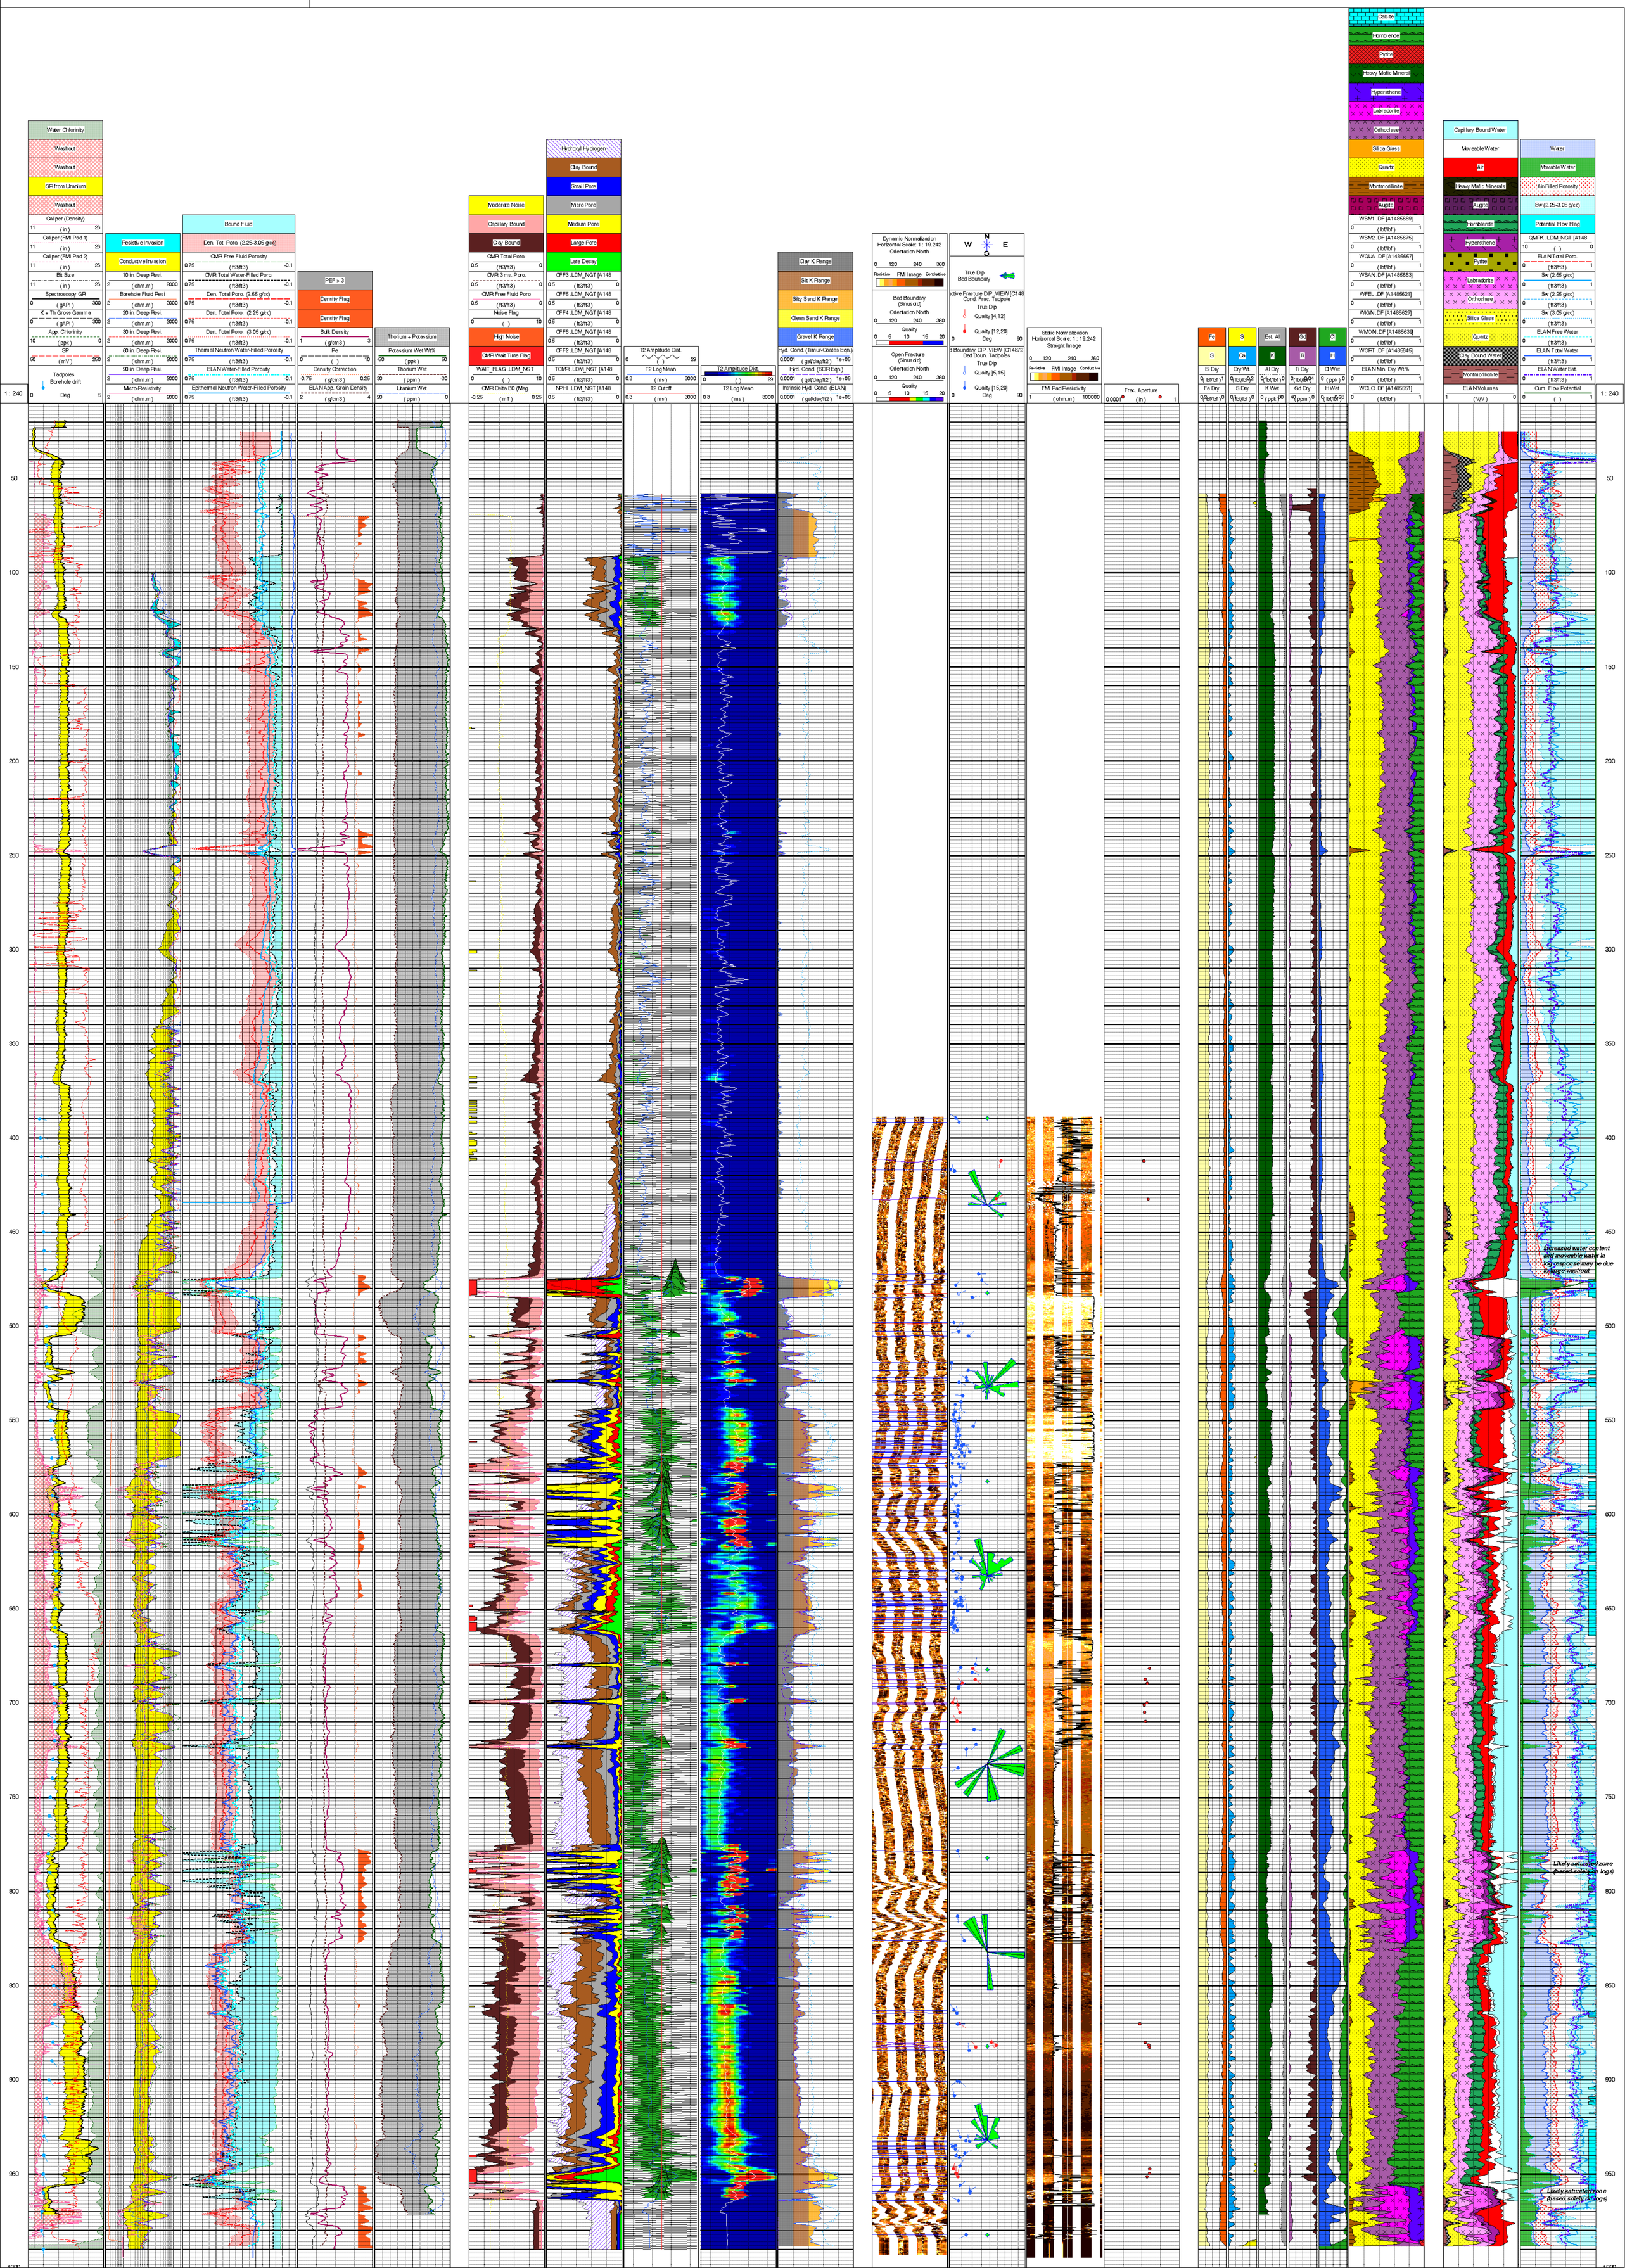
AIT-NGT tool run serves as primary depth reference.
AIT-NGT tool run serves as primary depth reference.
Water level between ~435' and 456' during logging.
ELAN* integrated log analysis performed with no porosity or water saturation constraints.